


LWL Wand-Patchfeld B16/29 für vorkonfektionierte Kabel FO wall mount patch box for pre-assembled cables

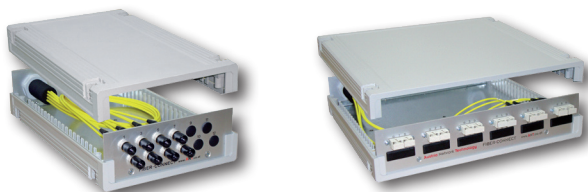

passendes Breakoutkabel mit D34/D39 Aufteiler
suitable breakout cable with D34/D39 Cable Splitter


Anwendung

LWL-Wandpatchfelder lassen sich als Kabelendverschlüsse mehrfasriger, vorkonfektionierte LWL-Breakoutkabel einsetzen. Sie dienen der Aufnahme und dem Schutz von GF-Aufteiladaptern sowie der optischen Anschlüsse. Die Patchfelder bestehen aus einem Metallchassis, das von einem zweiteiligen Schalengehäuse umgeben ist. Die Geräte werden montagefertig mit integrierten Kupplungen kundenspezifisch ausgeliefert.

Application

FO patch bays are used as termination devices for pre-assembled multi-fibre FO cables in 19" cabinets. They accommodate and protect FO distribution adapters and optical sockets. The panels consist of a metal housing with integrated splice organisers, enveloped by a double shell. The units are delivered ready for installation with custom built adapters.

Aufbau

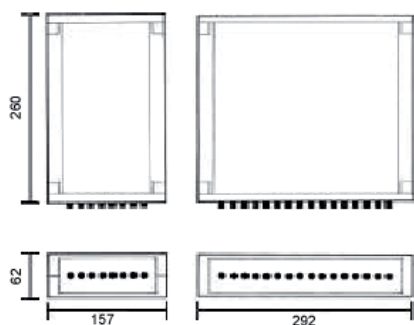

Construction

Technische Daten

Material Chassis	Stahlblech
Material Front-/Endplatte	Aluminium
Material Halbschalen	PVC
Abmessungen B16 (BxTxH)	157x260x62 mm
Abmessungen B29 (BxTxH)	292x260x62 mm
Farbe	RAL 7035
Kabeleinführungen B16/B29	1/2
Aufteilelement	D34
Temperaturbereich	-20°C ... 60°C
Gewicht B16/B29	1,2/2,5 kg

Technical Data

Material chassis	steel
Material front, end plate	Aluminium
Material half shells	PVC
Dimension B16 (WxDxH)	157x260x62 mm
Dimension B29 (WxDxH)	292x260x62 mm
Colour	RAL 7035
Cable inlets B16/B29	1/2
Adapter type	D34
Temperature range	-20°C ... 70°C
Weight B16/B29	1,2/2,5 kg

Bestellinformation

Art. Nr.	Beschreibung	Description
01804008	B16 Gehäuse 0(12) ST/FC	B16 Box 0(12) ST/FC
01804003	B16 Gehäuse 0(8) SC/LCDX, E2000	B16 Box 0(12) SC/LCDX
01804002	B16 Gehäuse 0(6) SCDX/LC-QUAD	B16 Box 0(6) SCDX/LC-QUAD
01804005	B29 Gehäuse 0(24) ST/FC	B29 Box 0(24) ST/FC
01804007	B29 Gehäuse 0(16) SC/LCDX, E2000	B29 Box 0(16) SC/LCDX
01804006	B29 Gehäuse 0(12) SCDX/LC-QUAD	B16 Box 0(12) SCDX/LC-QUAD
02004021	B16/29 Wandhalterung (4 Stk.)	B16/29 wall mount holder (4 pcs.)


Order Information


Bestellinformation


Order Information


ST	Anzahl/Typ	MM	SM
 B16	4(12)	01801001	01803001
	8(12)	01801002	01803002
	12(12)	01801020	01803006

FC	Anzahl/Typ	MM	SM
 B16	4(12)	01801005	01803007
	8(12)	01801006	01803008
	12(12)	01801021	01803009


SC	Anzahl/Typ	MM OM1/2	MM OM3	MM OM4	SM	SM/APC
 B16	2(8)	01801043	01806001	01807001	01803039	01803048
	4(8)	01801044	01806002	01807002	01803040	01803049
	8(8)	01801045	01806003	01807003	01803041	01803050


LCDX	Anzahl/Typ	MM OM1/2	MM OM3	MM OM4	SM	SM/APC
 B16	1(8)	01801050	01806004	01807004	01803042	-
	2(8)	01801007	01806005	01807005	01803010	-
	4(8)	01801008	01806006	01807006	01803011	-
	6(8)	01801010	01806007	01807007	01803012	-
	8(8)	01801051	01806008	01807008	01803043	-


SCDX	Anzahl/Typ	MM OM1/2	MM OM3	MM OM4	SM	SM/APC
 B16	1(6)	01801042	01806009	01807009	01803034	01803051
	2(6)	01801003	01806010	01807010	01803003	01803052
	4(6)	01801004	01806011	01807011	01803004	01803053
	6(6)	01801009	01806012	01807012	01803005	01803054

ST	Anzahl/Typ	MM	SM
 B29	4(24)	01801012	01803015
	8(24)	01801013	01803016
	12(24)	01801014	01803017
	24(24)	01801016	01803019

FC	Anzahl/Typ	MM	SM
 B29	4(24)	01801024	01803035
	8(24)	01801025	01803036
	12(24)	01801027	01803037
	24(24)	01801028	01803038

SC	Anzahl/Typ	MM OM1/2	MM OM3	MM OM4	SM	SM/APC
 B29	4(16)	01801046	01806013	01807013	01803044	01803055
	8(16)	01801047	01806014	01807014	01803045	01803056
	12(16)	01801048	01806015	01807015	01803046	01803057
	16(16)	01801049	01806016	01807016	01803047	01803058

LCDX	Anzahl/Typ	MM OM1/2	MM OM3	MM OM4	SM	SM/APC
 B29	2(16)	01801029	01806017	01807017	01803025	
	4(16)	01801030	01806018	01807018	01803026	
	6(16)	01801031	01806019	01807019	01803027	
	12(16)	01801033	01806020	01807020	01803029	
	16(16)	01801052	01806021	01807021	01803063	

SCDX	Anzahl/Typ	MM OM1/2	MM OM3	MM OM4	SM	SM/APC
 B29	2(12)	01801022	01806022	01807022	01803020	01803059
	4(12)	01801023	01806023	01807023	01803021	01803060
	6(12)	01801041	01806024	01807024	01803022	01803061
	12(12)	01801026	01806025	01807025	01803024	01803062